

Evaluation and Monitoring for the EU Directive on Energy End-Use Efficiency and Energy Services

How much energy saving is 1 % per year?

We still don't know, but we know better how to find out

Stefan Thomas, Wuppertal Institute

Eceee 2009 Summer Study

3 June 2009

evaluate
energy savings^{EU}

coordinated by



Wuppertal Institute
for Climate, Environment
and Energy

supported by

Intelligent Energy  Europe

Overview

- The Energy Services Directive (ESD) and monitoring energy savings; the EMEEES project
- The importance of monitoring for the effectiveness of the ESD: all, additional, and early energy savings
- How to ensure consistency between bottom-up and top-down calculation methods
- EMEEES methods tested in practice
- Conclusions on the selection of bottom-up and top-down methods
- How to achieve harmonisation?

ESD - the Directive on Energy End Use Efficiency and Energy Services

- The ESD sets an indicative target for EU MS to achieve **9% annual energy savings by 2016** from energy services and other energy efficiency improvement (EEI) measures.
- But until now, a ***common methodology on how to measure and evaluate these savings*** has not been developed.
- The set of common and harmonised evaluation methods developed by EMEEES will ***enable the MS to report EEI activities and their impacts in a common way and with a harmonised accounting system.***
- Consequently, the methods designed by EMEEES will help the MS to prove to the Commission the fulfilment of the indicative cumulative annual energy savings target of 9 percent by 2016.

Project Context: EMEEES

- **21 partners**
- **support** the implementation of the EU Directive on energy end-use efficiency and energy services, ESD (2006/32/EC)
- develop harmonised **methods** for evaluation of energy savings (20 bottom-up and 14 top-down cases of methods)
- build trust in methods and hence in savings evaluated
- develop a **template** for national energy efficiency action plans
- provide **practical advice and support** for the European Commission
- provide **platform for exchange**:
www.evaluate-energy-savings.eu

Additional or all energy savings?

- **ESD does not mention** that energy savings counting towards the 9 % target must be **in addition** to energy savings from autonomous changes
- But policy-makers and businesses usually want to know (but maybe not report) what is the additional impact of their measures
- **EU Action Plan for Energy Efficiency** obviously expects strong contribution from ESD (and other recent Directives): „new policy“ leading to **new and additional** energy savings compared to autonomous changes and even previous policy
 - EU Action plan requires 1.5 % per year of primary energy efficiency improvement; „new policy“ to bring 0.7 % per year (would be equivalent to ESD: average 1 % per year in non-ETS sectors)
 - autonomous changes: “brought about by natural replacement, energy price changes, etc.” (EU Action Plan)


„Early Action“

- ESD Annex I: “**Energy savings** in a particular year following the entry into force of this Directive that result from energy efficiency improvement **measures** initiated in a previous year not earlier than 1995 and **that have a lasting effect** may be taken into account in the calculation of the annual energy savings.”
- “... that have a lasting effect”: Interpretation unclear!
 - ‘**Early measures**’?
(e.g., building code from 2005 and still in force in 2008 - 2016)

Or

- **‘Early energy savings’?**
(e.g., from energy-efficient building constructed in 2005)

Potential consequences of admitting both autonomous and early energy savings: in the extreme case, no new additional energy savings needed at all

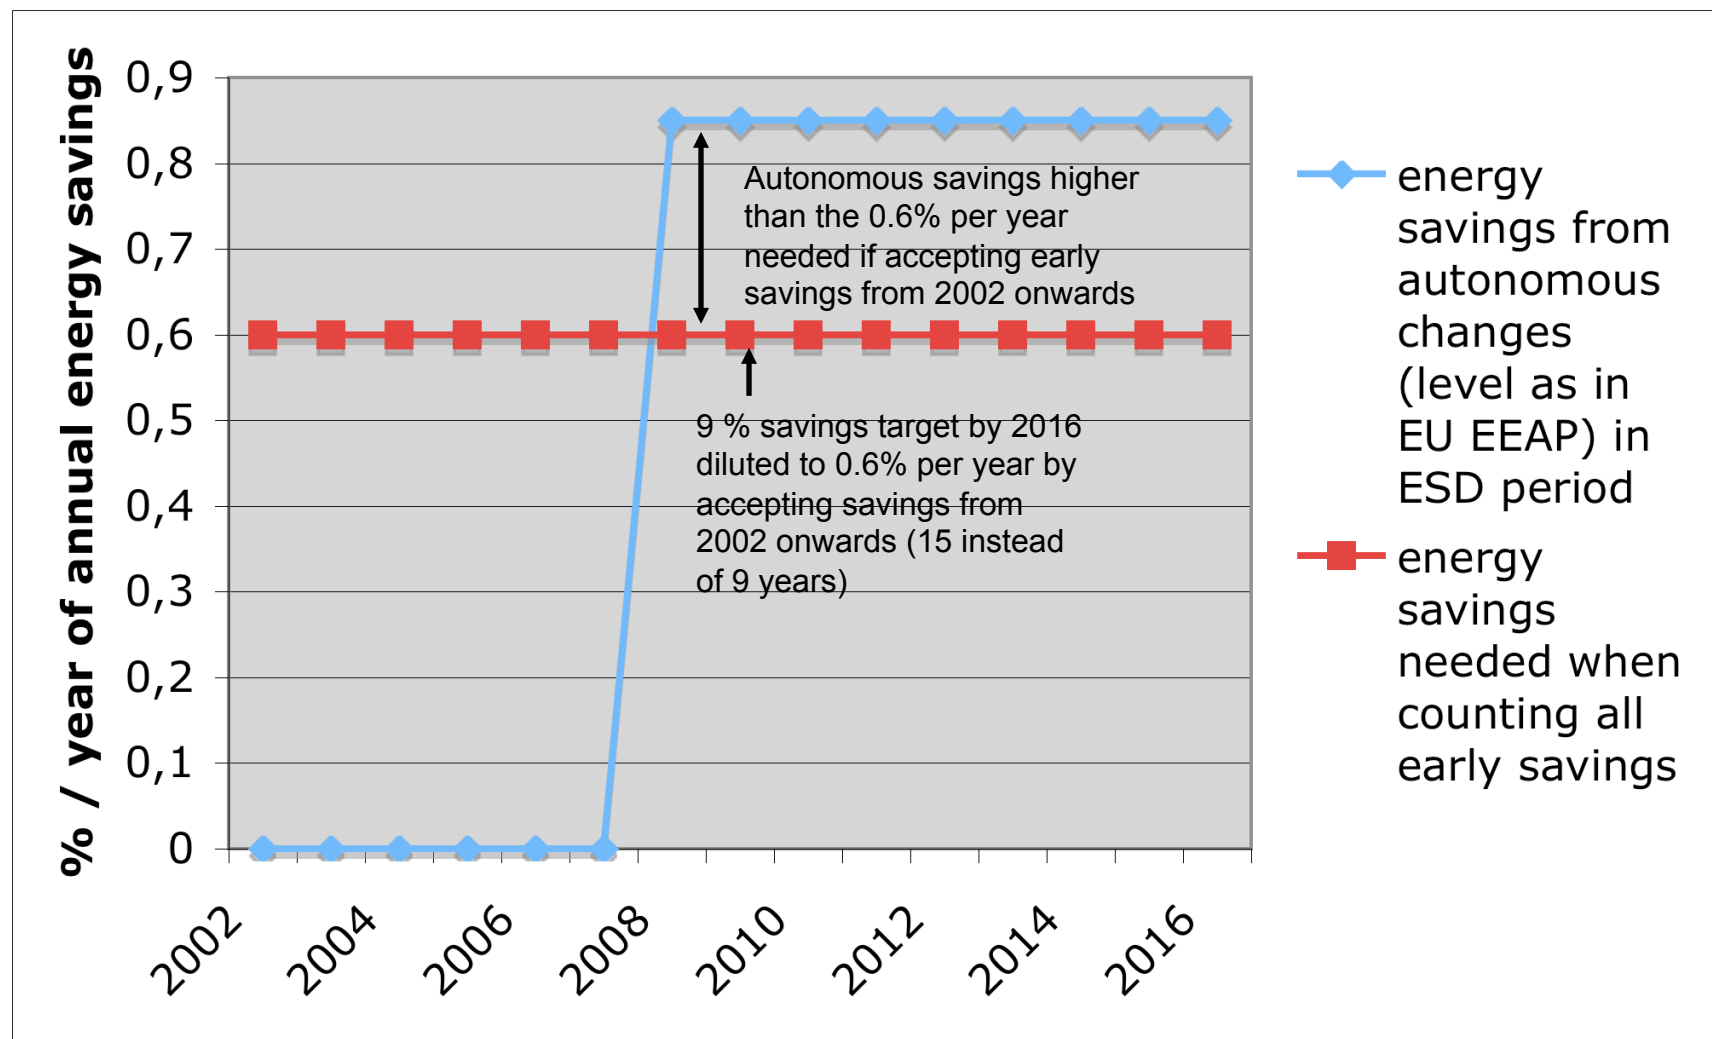

Conclusions on autonomous and early energy savings

- **Enable both** the evaluation of **all** energy savings (including autonomous savings) **and** energy savings additional to autonomous changes (**additional** energy savings)
- **Enable** the evaluation of **early energy savings**, if the Commission with the ESD Committee and/or a Member State decides to allow these to be counted towards achieving the ESD target

Bottom-up methods (Harry Vreuls, 11.00 here)

- ESD Annex IV (1)

*“A bottom-up calculation method means that energy savings obtained through the implementation of a **specific energy efficiency improvement measure** are measured in kilowatt-hours (kWh), in Joules (J) or in kilogram oil equivalent (kgoe) and added to energy savings results from other specific energy efficiency improvement measures”.*

Top-Down methods (Didier Bosseboeuf, 11.30h)

- ESD Annex IV

*“A top-down calculation method means that the amount of energy savings is calculated using the **national or larger-scale aggregated** sectoral levels of energy savings as the starting point”.*


- In other words, top-down methods rely on **energy efficiency indicators** calculated from national statistics (also called “top-down indicators”, e.g., ODYSSEE indicators)

Baselines and reference trends

- Unlike energy, **energy savings** can usually **not directly be measured**, but **in relation to a reference situation**
- ESD Annex IV: “*Energy savings shall be determined by measuring and/or estimating consumption, **before and after** the implementation of the measure,...*”
- For bottom-up methods, the reference situation ‘before’ the measure is called the **baseline**.
- For top-down methods, energy savings are calculated from the difference between the actual value of an indicator and the value for the same year that would have materialised in a **reference trend**.


Consistency in integrating TD and BU results

Top-down

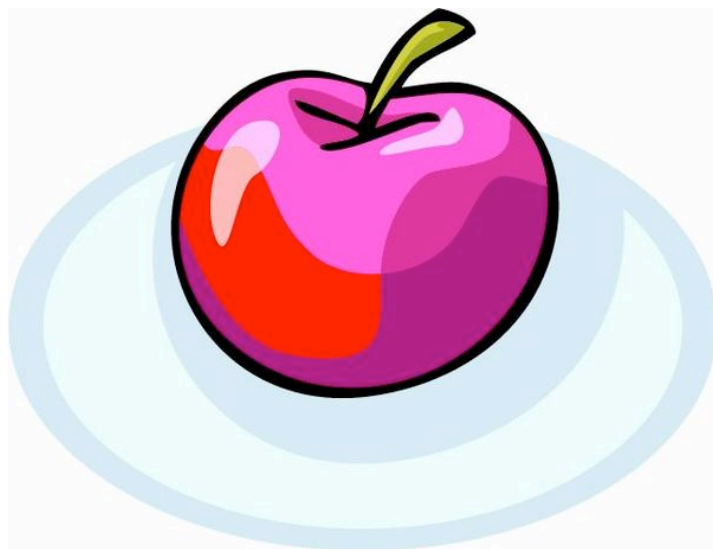

+

Bottom-up

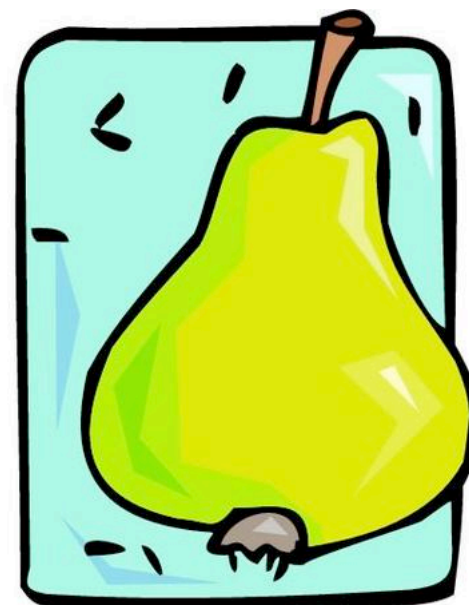

=> ESD energy savings ?

Bottom-up


Element	All energy savings	Additional savings
Baseline case 1: replace existing equipment	Before action situation or stock average	Without measure situation or inefficient market average
Baseline case 2: add-on energy efficiency action	Before action situation or stock average	Before action situation or stock average
Baseline case 3: new building or equipment	A reference situation	A reference situation
Avoid double counting	yes	yes
Multiplier effects	yes	yes
Free-rider effects	no	yes

Top-down


Type of indicator	All energy savings	Additional savings
Specific energy consumption, solar water heaters	For new appliances and vehicles, and vehicle stock: Reference trend = Zero change (‘apparent total’ savings close to all savings)	Reference trend = EU default value based on 3 countries with ‘slowest’ trend. Plus EU default value for price elasticity (rising price)
Unit energy consumption of sectors, other diffusion	No reference trend from statistics possible. Zero change not valid (‘apparent total’ savings not the same as all savings). Calculate reference trend by bottom-up modelling with frozen efficiency??	No EU level reference trend possible. Use country-specific reference trend if possible. If not: Calculate reference trend by bottom-up modelling ?? Plus EU default value for price elasticity (rising price).

Some Top-down indicators can go in any direction


Case of a stabilisation

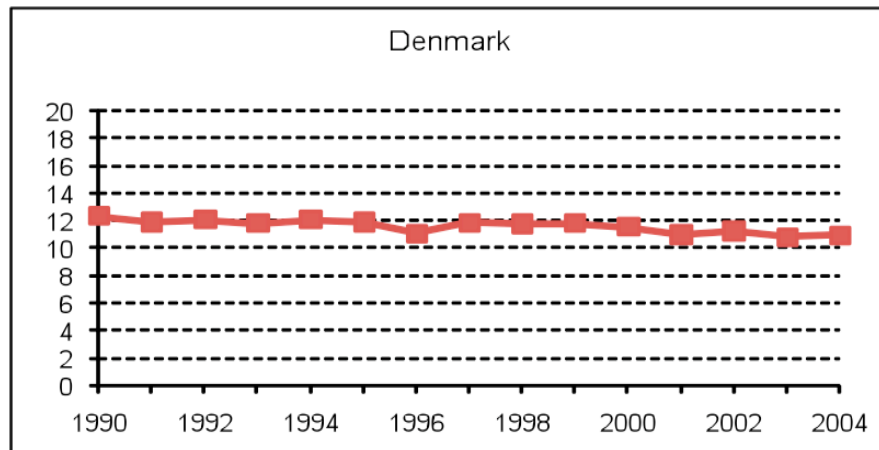

Case of an increase

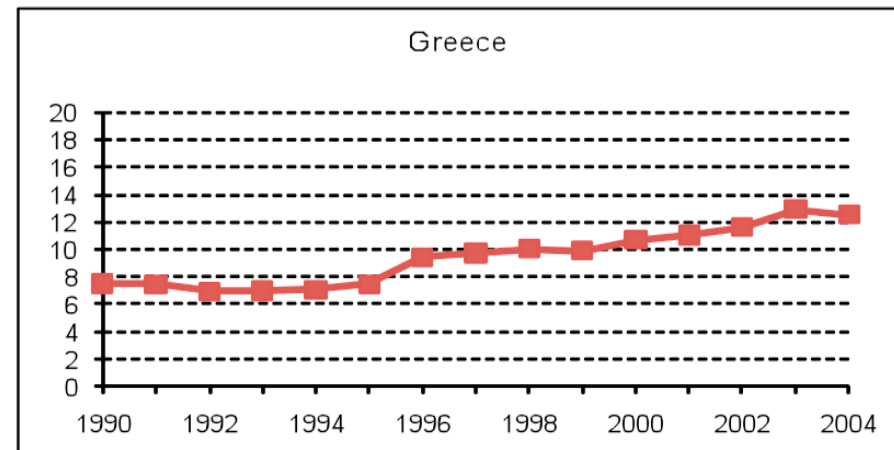

Case of a reduction

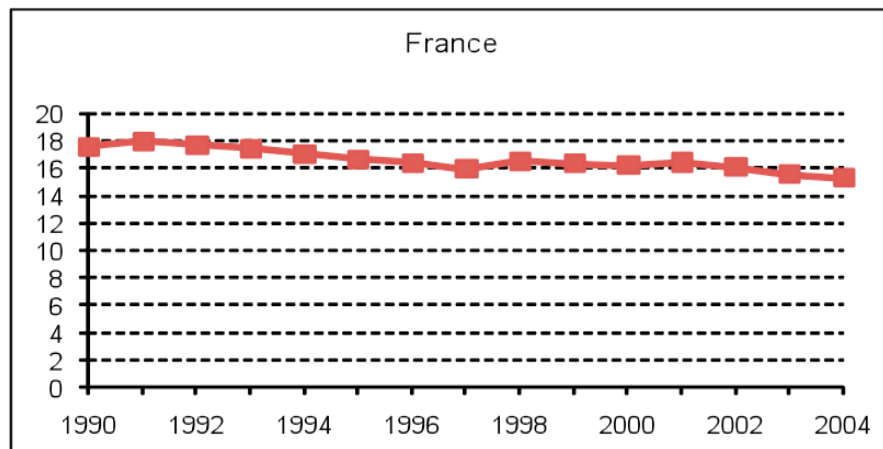

Tests of EMEEES methods

- 13 national workshops, an EU workshop (June 2007) and an EU Conference: general principles accepted, but comments on details => helpful to simplify approaches
- Pilot tests on real EEI measures in four MS:
=> EMEEES bottom-up methods and case applications tested can be applied in principle;
improvements in the details proposed;
e.g., some default values need to be adapted
- Which EMEEES cases can be applied for the measures mentioned in the NEEAPs? => table in the paper

Advantages of BU and TD methods

- Bottom-up able to cover 90% of ESD savings (result of analysis of Member States' planned measures)
- Bottom-up needs specific monitoring but provides info on (cost) effectiveness of measures, potential improvements, GHG emission reductions.
- Bottom-up has difficulties to measure multiplier *and free-rider* effects, impact of soft measures, mainly important for appliances and vehicles
- Top-down based on specific energy consumption indicator of equipment (e.g., kWh/unit of equipment/year or kWh/km) in principle includes multiplier *and free-rider* effects, impact of soft measures => well-suited to capture the effects of the whole package of measures

Conclusion on selection of BU or TD methods (1)

- 1) Use **top-down** calculation methods for **electric appliances and vehicles**, for which there is a well-defined indicator of the sales-weighted annual energy consumption per unit of appliance or per vehicle, and for solar water heaters.
- Reference trend for *additional* savings = average trend of the three countries with the slowest decrease;
Reference trend for *all* savings = base year (2007) value of the indicator;
for solar water heaters, zero m2 increase in each case
- Correct the reference trend for *additional* savings in case of energy market price increase, value of price elasticity: default +/- 0.1 or 0.2

Conclusion on selection of BU or TD methods (2)

- 2) use **top-down** methods to calculate the effects of **energy taxation** and add them to the effects of bottom-up calculations for a sector, if these bottom-up calculations exclude free-rider effects.
- The energy savings due to taxation must not be added to results of top-down calculations on sectors or end-use equipment, if the latter already include an analysis of price elasticities to separate the effects of energy taxation.

Conclusion on selection of BU or TD methods (3)

- 3) Use **bottom-up** calculation methods for **all other end-use sectors, end-uses, and energy efficiency improvement measures**. This is particularly the case for buildings, for the industry and tertiary sectors with their larger final consumers that are easier to monitor, and for modal shifts and eco-driving in transport.
- In these areas, structural effects can usually not be corrected for in top-down indicators. This will disable the use of top-down methods based on unit energy consumption and diffusion indicators. By contrast, bottom-up calculations are usually feasible.
- 4) At the end of the day, data availability in a Member State will determine the use of methods

Towards a harmonised calculation model

- ESD requires European Commission to propose a harmonised calculation model of BU and TD methods
- Harmonisation = as many **default values** as possible?
- Or **rather harmonised rules** for
 - a) **definition** of formulas, parameters, monitoring methods, calculation procedures
=> EMEEES methods and case applications a source
 - b) **reporting** of results? => EMEEES reporting checklist a start
- Quality of evaluations and level of harmonisation will improve through **learning by doing** and **exchanging experience**
- Evaluation needed to learn for **refinement** of energy efficiency improvement measures

“The sole responsibility for the content of this presentation lies with the authors. It does not necessarily reflect the opinion of the European Communities. The European Commission is not responsible for any use that maybe made of the information contained therein.”


Contact:

Stefan Thomas, Ralf Schüle
Wuppertal Institute for Climate, Environment and Energy
Tel.: +49-(0)202-2492-110
Fax.: +49-(0)202-2492-250
Döppersberg 19 | 42103 Wuppertal


Email: info@evaluate-energy-savings.eu
URL: www.evaluate-energy-savings.eu
www.wupperinst.org



Top-down indicator with ,right' trend

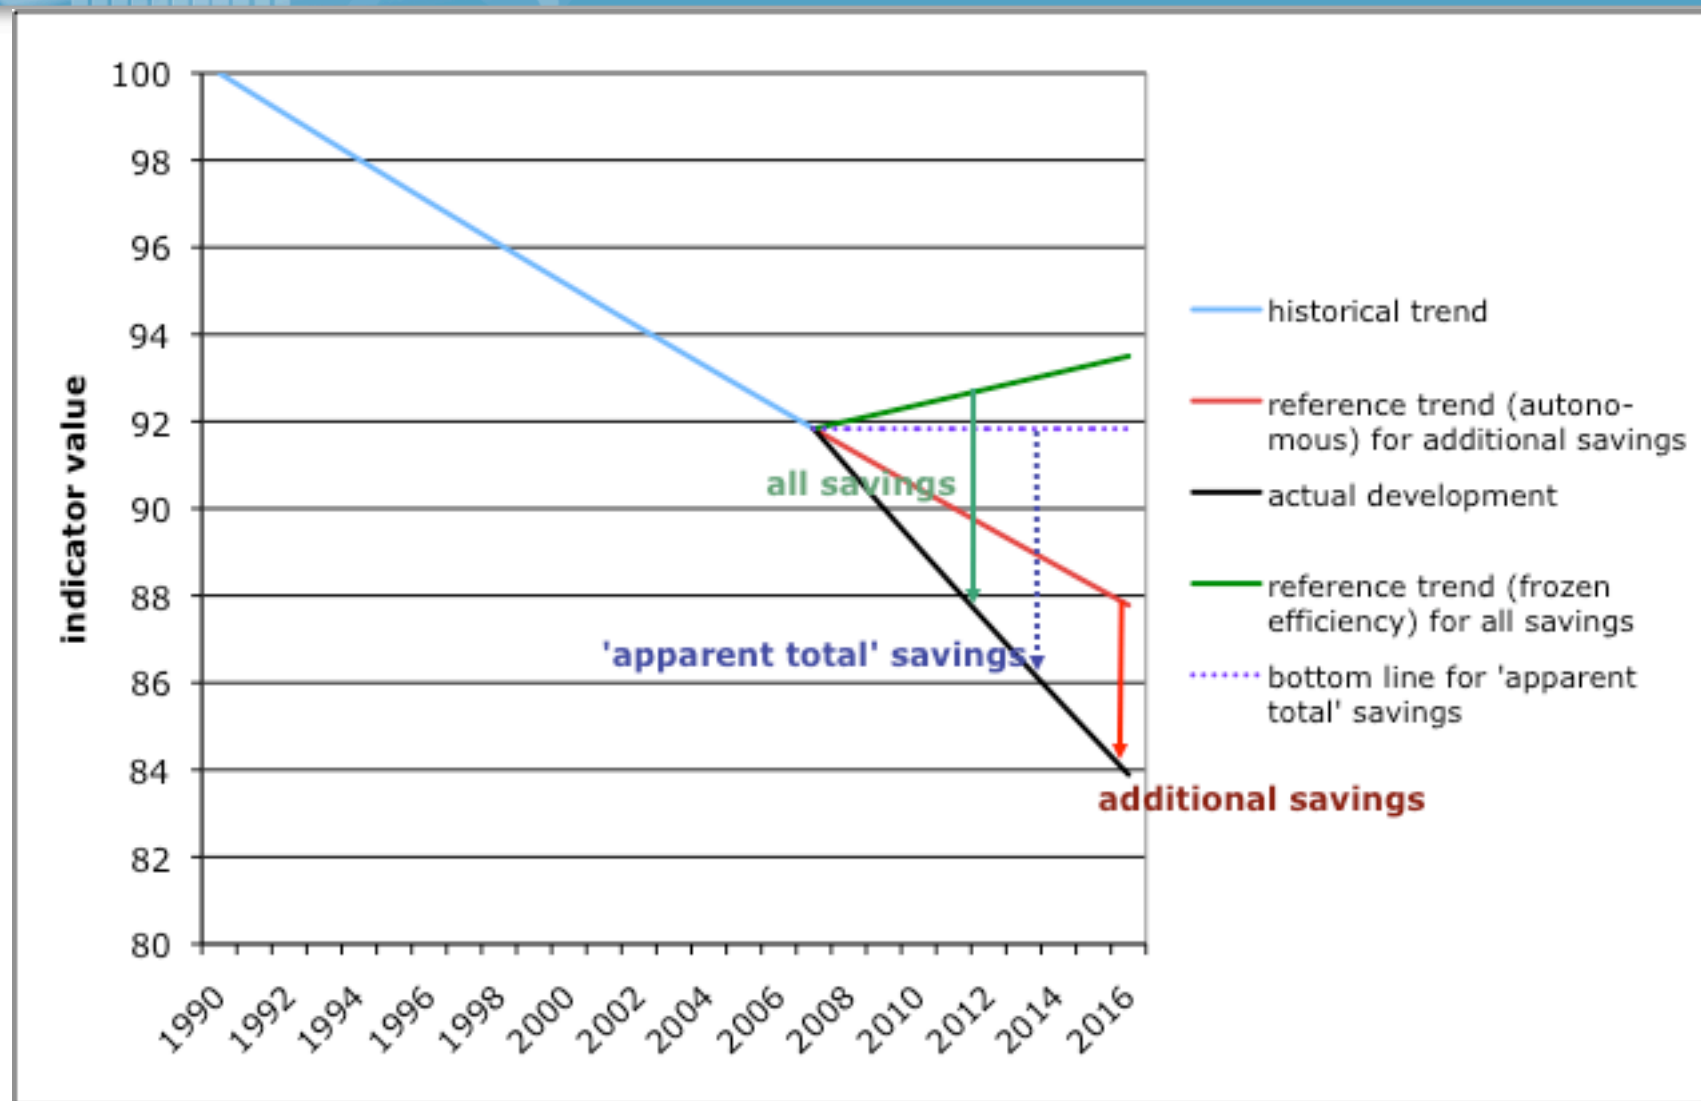

Top-down indicator with ,wrong' trend

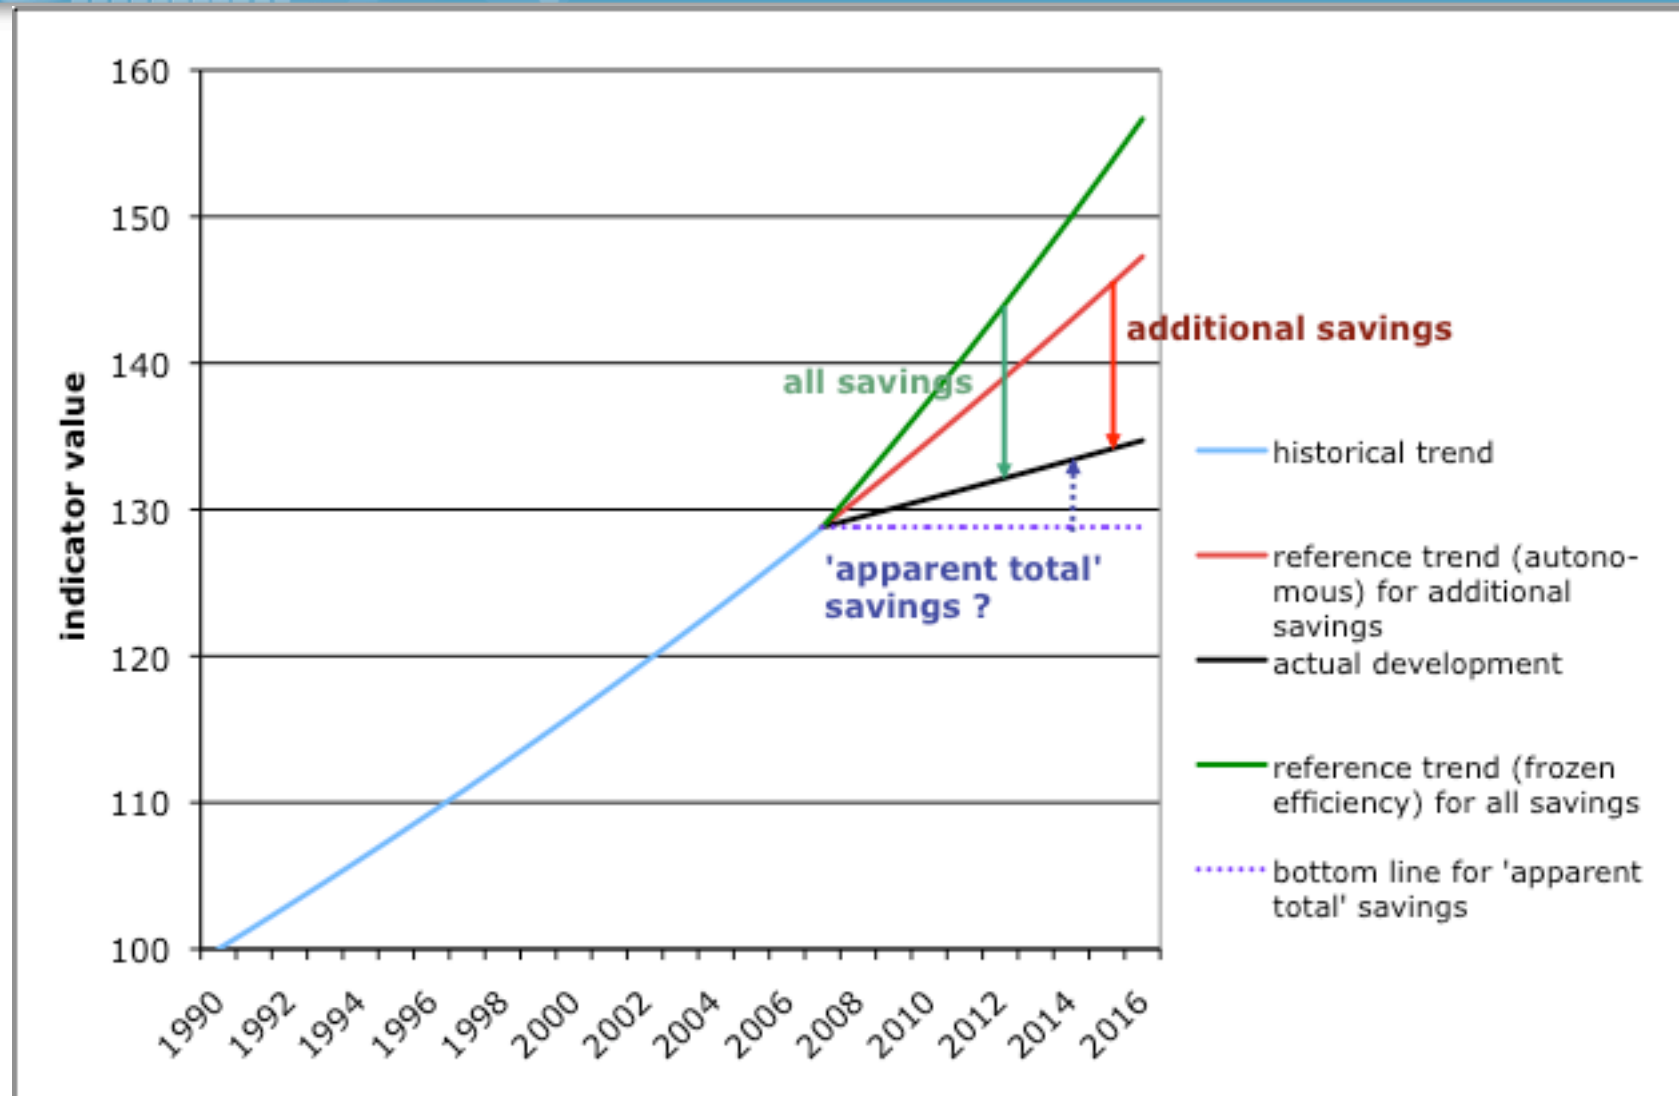


Applicability of top-down calculation methods

Full title	Robust results?	Data MS	Applicable
Building shell and heating systems	Some	EU-15	sometimes
Household, all electricity for non-heating end-uses	No	EU-15	
Specific white goods (refrigerators)	Yes	EU-15 (most)	yes
Solar thermal collectors / solar heaters	Yes	all	yes
Building shell and heating systems	Yes	few	
Electricity end-uses in Services	No	few	
Thermal energy uses in Industry	No	EU-15 (all)	
Industrial electricity use	No	EU-15 (all)	
Industrial CHP	No	all	
New cars	Yes	many	yes
Improvement of car, bus and truck stock	Yes	many	yes
Modal shift in passenger transport	Some	most	sometimes
Modal shift in goods transport	Some	most	sometimes
General energy taxation	Yes*	all	yes*

Objectives of evaluation - further considerations

- The ESD is directed towards the **Member States**
=> for one sector or type of end use, **only one aggregate figure** of energy savings from all EEI measures together (the 'package') needs to be reported
- => No need to report savings for individual measures / measure operators (e.g., ESCOs, energy companies)
- ESD reporting needs **may differ** from national or other reporting needs
=> **synergies** possible (e.g., *additional* energy savings for ESD - *additional* greenhouse gas reductions from policies and measures for UNFCCC reporting),
but **conversion** may be needed (e.g., *discounted* savings in white certificates schemes - *annual* energy savings for ESD reporting)
- Evaluation **entails a cost**; but particularly **bottom-up** evaluation allows insights in **why** an EEI measure is **effective** or not, and its **costs**
=> important data for **improving processes and (cost-)effectiveness**

Overall procedure to meet ESD demands

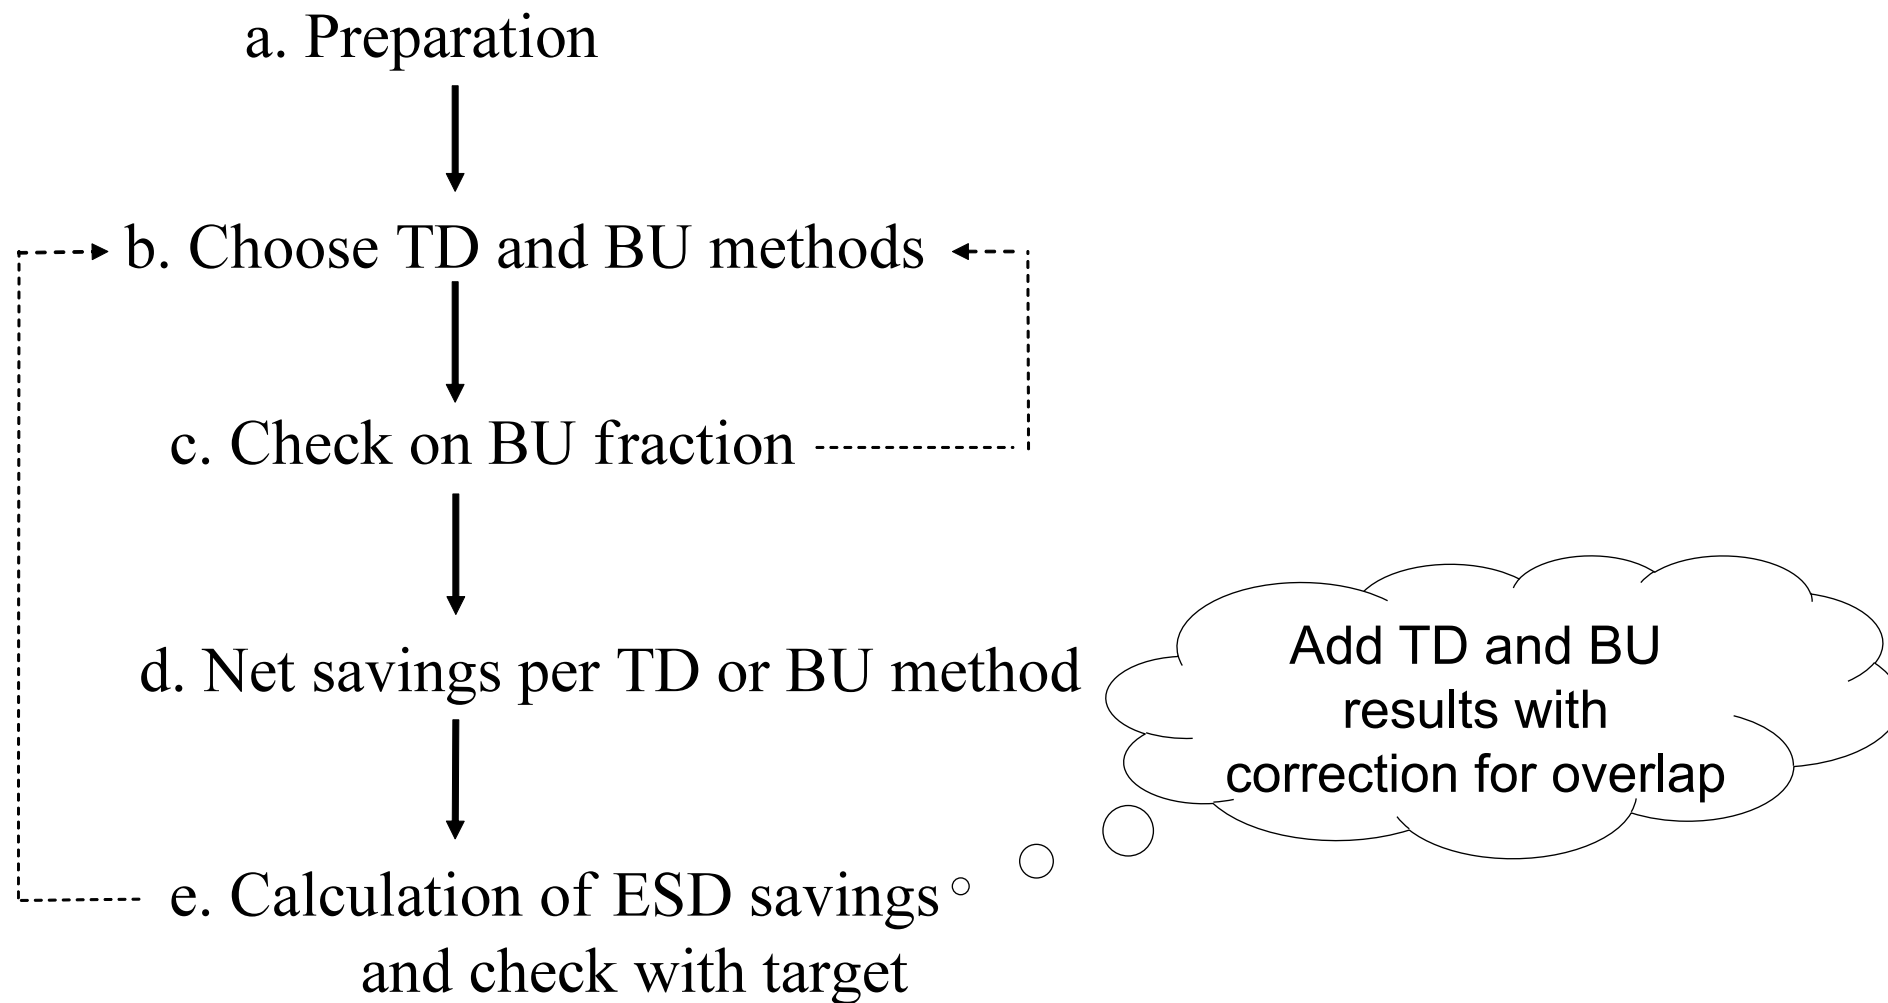

Can MS prove savings for measures in the NEEAPs?

BU-methods	Countries																										
	at	be	bg	cy	cz	dk	ee	fi	fr	de	hu	ie	it	lv	lt	lu	mt	nl	pl	pt	ro	sk	si	es	se	uk	
H - New dwellings	Y	Q/Y		Q		Y		Q	Y	Q		Q	Y	Q	Y	Q		Q	Y	Q		Y	Q	Q	Y	Q	
H - Building envelope	Y	Q/Y	Y	Q	Y				Y	Q	Q	Q	Q	Q	Y			Q	Y	Q	Q	Y	Q	Q	Y	Q	
H - Heating systems	Y		Y	Q	Y			Q	Y	Q								Q	Y		Y	Y	Q	Q	Y	Q	
H - Condensing boilers	Y	Q/Y	Y	Q	Y	Y					Q	Q						Q									
H - White goods	Y		Y		Y					Q			Q				Q	Q	Y	Q	Y	Y	Q	Q/Y	Y		
H - Solar, HP, etc	Y	Q/Y		Q	Y					Q			Q			Q	Q			Q	Y		Q		Y		
S - New buildings	Y	Q/Y		Q		Y		Q	Y	Q		Q	Y		Y	Q		Q		Q		Y	Q			Q	
S - Heating systems	Y	Q/Y	Y	Q	Y				Y		Q	Q			Y				Y			Y	Q	?			
S - Lighting	Y	Q/Y	Y		Y					Q			Q	Q	Y					Q			Q	Q/Y			
S - VAC	Y			Q								Q	Q										Q	Q/Y			
S - Office appliances	Y									Q		Q		Q					Y	Q		Y		Q/Y			
I - Lighting-Industry		Q/Y																					Q				
I - VAC - Industry																											
I - Electric motors		.Y	Y										Q			Q							Q				
I - Variable speed			Y																				Q				
T - Eff.car-bus-truck	Y	Q/Y		Q	Y			Q	Y	Q	Q	Q	Y	Y		Y		Q	Y	Y		Y	Q	Y			
T - Eco-driving	Y							Q	Y	Q		Q	Q				Y	Q	Y	Q		Y		Q	Y	Y	
T - Modal shift bus/bike	Y	Q/Y		Q	Y		Y					Q		Q	Y		Y		Y	Y		Y	Q	Q		Y	
Energy audits		.Y	Y		Y			Q	Y					Q					Y			Y	Q	Q			
Energy Perf.Contracting	Y				Y?	Y				?	Q		?								?						
Vol.Agreement-sector		.Y						Q		Q		Y						Q	Y		Y			Q		Y/Q	
Vol.Agreement-indiv.																											
TD-methods																											
H - Space heating	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	Y	Y	Y	Y	Y	Y	Y	Y	
H - Main appliances	Y		Y		Y			Y	Y	Y		Y	Y				Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	
H - Solar Boiler	Y	Y	Y	Y						Y		Y	Y			Y	Y		Y	Y	Y		Y		Y		
T - New cars	Y	Y	x	Y	Y	x	Y	Y	Y	y		Y	Y	Y	x	Y	x	Y	Y	Y	x	Y	Y	Y	Y	Y	
T - Vehicle stock			?	x		x	?	Y	Y	Y	Y	Y		Y	x		x	Y	Y	Y	x	Y	Y	Y	Y	Y	
Tax on energy								Q		Y		Y		Y	Y								Y		Y	Y	

The EMEEES Consortium

21 partners
well-experienced
in evaluation of
energy savings

Project partner	Country
Wuppertal Institut for Climate, Environment, Energy (WI)	DE
Agence de l'Environnement et de la Maitrise de l'Energie (ADEME)	FR
SenterNovem	NL
Energy research Centre of the Netherlands (ECN)	NL
Enerdata	FR
Fraunhofer-Institut für System- und Innovationsforschung (FhG-ISI)	DE
SRC International A/S (SRCI)	DK
Politecnico di Milano, Dipartimento di Energetica, eERG	IT
AGH University of Science and Technology (AGH-UST)	PL
Österreichische Energieagentur – Austrian Energy Agency (A.E.A.)	AT
Ekodoma	LV
Istituto di Studi per l'Integrazione dei Sistemi (ISIS)	IT
Swedish Energy Agency (STEM)	SE
Association pour la Recherche et la Développement des Méthodes et Processus Industriels (ARMINES)	FR
Electricité de France (EdF)	FR
Enova SF	NO
Motiva Oy	FI
Department for Environment, Food and Rural Affairs (DEFRA)	UK
ISR – University of Coimbra (ISR-UC)	PT
Dong Energy	DK
Centre for Renewable Energy Sources (CRE S)	GR